

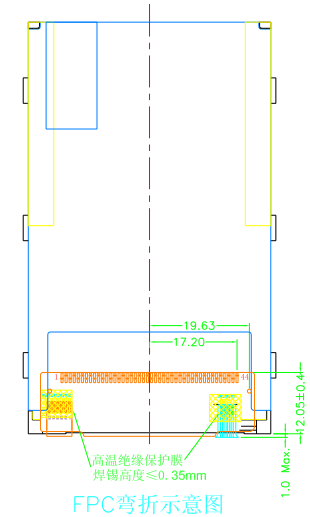
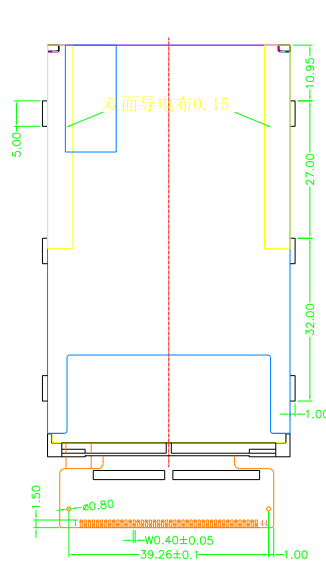


| Rec.# | Revision content description | Date |
|-------|------------------------------|-----------|
| #0 | FIRST ISSUE | 2013-08-1 |

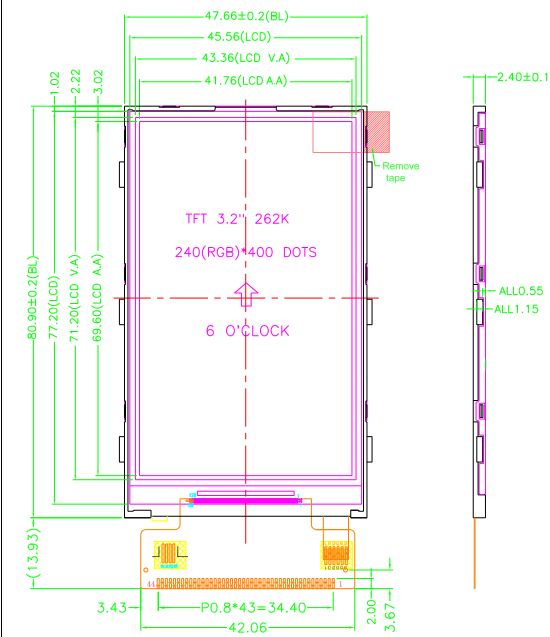

| PIN | ASSIGNMENT |
|-----|------------|
| 1 | GND |
| 2 | NC/YD |
| 3 | NC/XR |
| 4 | NC/YU |
| 5 | NC/XL |
| 6 | GND |
| 7 | NC |
| 8 | NC |
| 9 | FMARK/NC |
| 10 | NC |
| 11 | NC |
| 12 | RESET |
| 13 | NC |
| 14 | NC |
| 15 | D15 |
| 16 | D14 |
| 17 | D13 |
| 18 | D12 |
| 19 | D11 |
| 20 | D10 |
| 21 | D9 |
| 22 | D8 |
| 23 | D7 |
| 24 | D6 |
| 25 | D5 |
| 26 | D4 |
| 27 | D3 |
| 28 | D2 |
| 29 | D1 |
| 30 | DO |
| 31 | RD |
| 32 | WR |
| 33 | RS |
| 34 | CS |
| 35 | GND |
| 36 | IOVCC |
| 37 | VCC |
| 38 | LEDK5 |
| 39 | LEDK4 |
| 40 | LEDK3 |
| 41 | LEDK2 |
| 42 | LEDK1 |
| 43 | LEDA |
| 44 | GND |

- NOTES:
1. DISPLAY TYPE: TFT(262K COLOR)
 2. VIEWING DIRECTION: 6:00
 3. DISPLAY MODE: NORMALLY WHITE
 4. DRIVER IC: R61509V
 5. BACK LIGHT: 5CHIP-WHITE LED; PARALLEL CONNECTION
 6. OPERATING TEMP.: -20°C~70°C
 7. STORAGE TEMP.: -30°C~80°C
 8. UNMARKED TOLERANCE:±0.2

| DRAWING NO. | | | | LCM-LP032WQ30-N | | | | MODULE NO. | LP032WQ30 |
|-------------|------|------|-------|-----------------|----------|----------|---------------|------------|-----------|
| DESIGNED | | | | CHECKED | VERIFIED | APPROVED | DRAWING CALSS | | |
| | UNIT | SIZE | SCALE | Hunter | | | | CD | |
| | mm | A4 | 1:1 | 2013-08-1 | | | | | |