

深圳市艾斯迪科技有限公司

TITLE

模组图

SCALE

1 : 1

UNIT

mm


Part no

PAGE

1 / 1


EDITION

A0

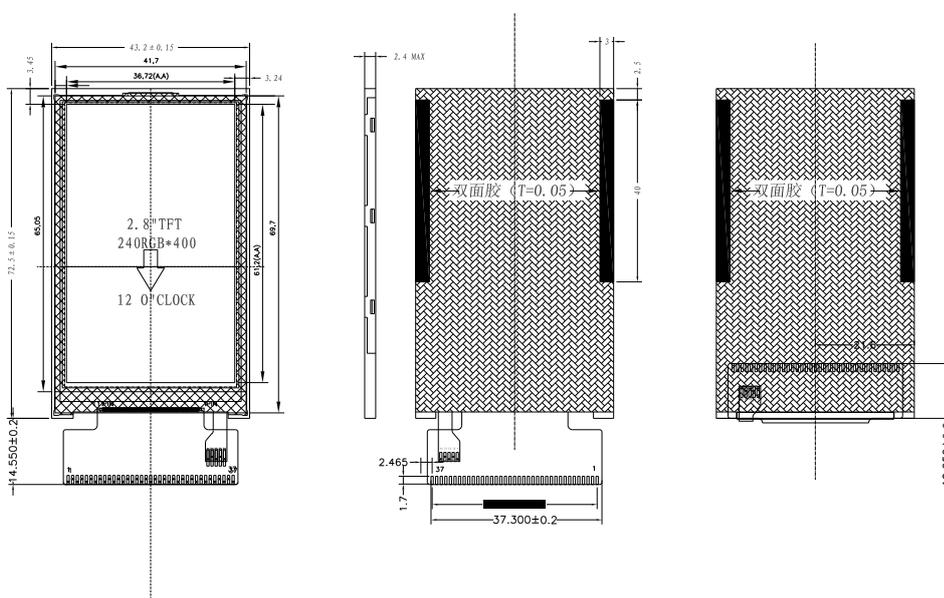

PIN	DESC.
1	DB0
2	DB1
3	DB2
4	DB3
5	GND
6	IOVCC(1.8/2.8V)
7	CS
8	RS
9	WR
10	RD
11	NC
12	NC
13	NC
14	NC
15	NC
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	NC
22	DB4
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	RESET
32	VCI
33	IOVCC
34	GND
35	DB5
36	DB6
37	DB7

- 技术要求:
- 1) 液晶显示模式: 2.8" TFT
 - 2) 视角: 12 O' CLOCK
 - 3) 点阵: 240(RGB) X 400 DOTS
 - 4) 驱动芯片型号: ILI9327/ST7793
 - 5) 背光: LED WHITE(X4), 并联
 - 6) 工作温度: -20° C ~ 70° C
储存温度: -30° C ~ 80° C
 - 7) 未注尺寸公差: ±0.2mm
 - 8) 产品符合: RoHS标准



ANGLE	±1.0°			
60.01 - 120.00	±0.3			
30.01 - 60.00	±0.2			
0.00 - 30.00	±0.15			
FIELD	TOLERANCE	REV(标记)	DATE (日期)	DESCRIPTION (描述)

设计/日期	审核/日期	核准/日期	图纸视角	第三角法
1	2	3	4	5